




NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev.Date	Modified By	Brief Description

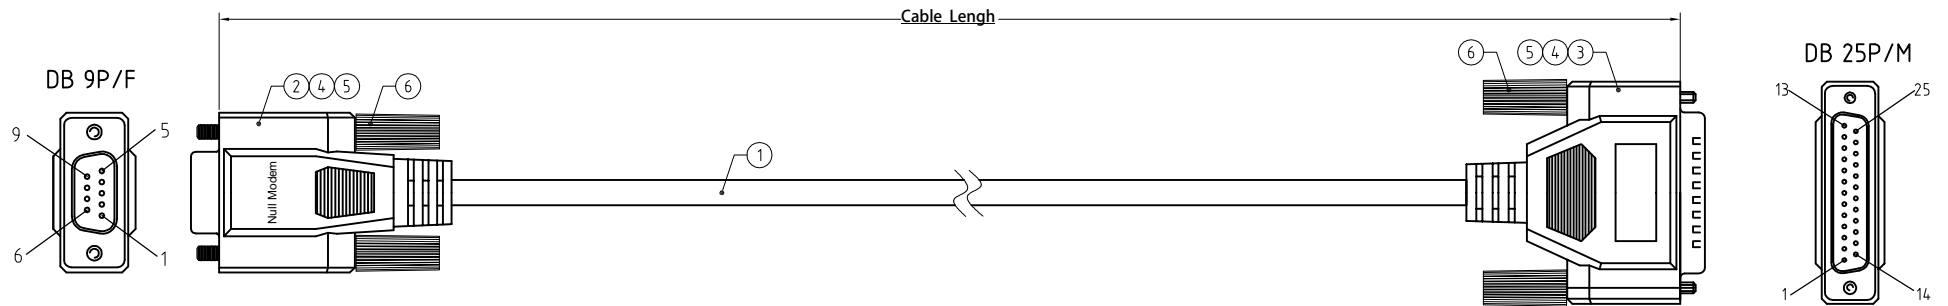

Wire Details

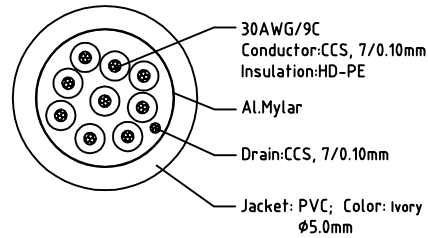


Electrical character:

- 1) 100% Open/short/Intermittent testing
- 2) Withstanding voltage: DC 300V AT 10ms.
- 3) Insulation resistance: 10M Ohm(min)
- 4) Conductive resistance: 5 Ohm(max)


PIN ASSIGNMENT:

DB 9P/F	DB 25P/M
1	4&5
2	2
3	3
4	6
5	7
6	20
7&8	8
9	22
SHELL	SHELL

Length	Tolerance
6ft	(1830 +- 25)
10ft	(3550 +- 30)



Label:
Size: 1.97" x 0.79" mm



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑥	Thumbscrew	#4-40UNC,ø2.8xL44.5mm,Nickel Plated,Molding PVC(Ivory)	4	PCS
⑤	Overmold	PVC,45Pa,Ivory	N/A	G
④	Innermold	PE,Low density	N/A	G
③	DB_Conn	DB 25P/M,PIN G/F,Blue Insulation,Steel-Shell(Nickel Plated),Solder type	1	PCS
②	DB_Conn	DB 9P/F,PIN G/F,Blue Insulation,Steel-Shell(Nickel Plated),Solder type	1	PCS
①	Cable	30#(7/0.10CCS)×9C+D+A+PVC,Ivory,OD5.0mm	N/A	MM



DRAWN BY	DATE: 2014/09/01	DESCRIPTION: DB 9P F TO DB 25P M Cable,30#,6FT
CHECKED BY	SHEET 1 of 1	ITEM NO. CM-180501BSTK
APPROVED BY	SCALE None	REV. 00 UNIT: mm