



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev.Date	Modified By	Brief Description

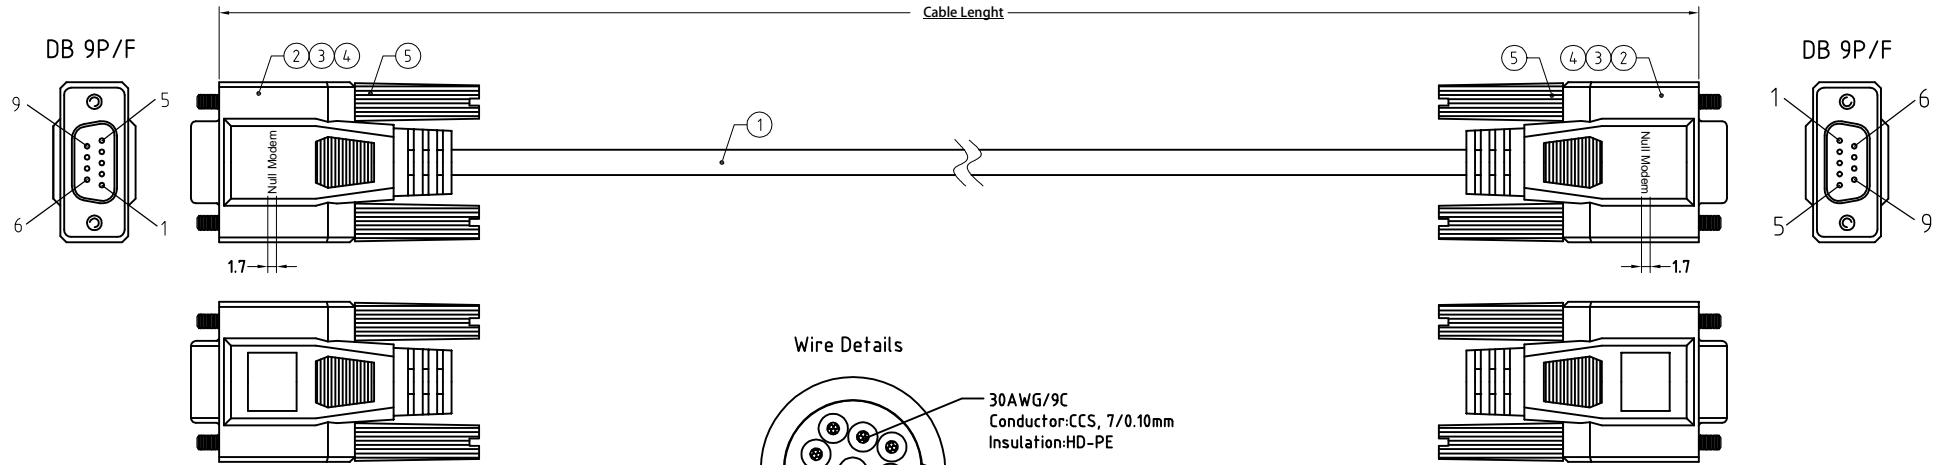

Wire Details

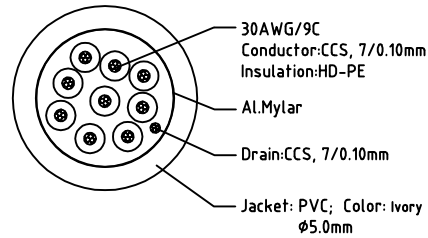

Electrical character:


- 1) 100% Open/short/Intermittent testing
- 2) Withstanding voltage: DC 300V AT 10ms.
- 3) Insulation resistance: 10M Ohm(min)
- 4) Conductive resistance: 8 Ohm(max)

Length Tolerance

6ft	(1830 +- 25)
10ft	(3550 +- 30)
25ft	(7625 +- 70)

PIN ASSIGNMENT:

DB 9P/F	DB 9P/F
1&6	4
2	3
3	2
4	1&6
5	5
7	8
8	7
SHELL	SHELL



Label:
Size: 1.97" x 0.79"

XXFt DB9 Female/Female
Null Modem Cable

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
5	Thumbscrew	#4-40UNC, $\phi 4.0 \times L37.4\text{mm}$, Nickel Plated, Molding PVC(Ivory)	4	PCS
4	Overmold	PVC, 45Pa, Ivory	N/A	G
3	Innermold	PE, Low density	N/A	G
2	DB_Conn	DB 9P/F, PIN G/F, Blue Insulation, Steel-Shell(Nickel Plated), Solder type	2	PCS
1	Cable	30#(7/0.10CCS) $\times 9\text{C} + \text{D} + \text{A} + \text{PVC}$, Ivory, OD5.0mm	N/A	MM

CABLEMAX

DRAWN BY	DATE: 2014/11/03	DESCRIPTION: DB 9P F TO F Cable
CHECKED BY	SHEET 1 of 1	ITEM NO. CM-180503BSTK
APPROVED BY	SCALE None	REV. 00 UNIT: mm